

*Intrinsically Safe Compact Balances*

# **EK-EP**

*Series*



**EK-3000EP**

*For precise weight measurement in potentially explosive atmospheres*



**EK-300EP**

IECEX: Ex ia IIB T3 Ga  
ATEX: II 1G Ex ia IIB T3 Ga  
FM/FMc (NEC505): AEx / Ex ia IIB T3  
FM/FMc (NEC500): IS / I / 1 / C,D / T3C



**AND** ...Clearly a Better Value  
A&D Company, Limited  
<http://www.aandd.jp>



## Features

- ✓ Compact, lightweight and extremely affordable while providing excellent explosion protection
- ✓ Battery operation\*1 (approx. 250 hours) for high portability, requiring no power supply from a safe area via a safety barrier
- ✓ Auto power OFF function to save battery power
- ✓ Easy-to-read LCD display with backlight (16 mm character height)
- ✓ Hygienic and chemically resistant stainless steel (SUS304) weighing pan
- ✓ Multiple weighing units: g, oz, lb, ozt, ct, mom, dwt, gr, N, in addition to pcs (counting mode), % (percent mode) and SG (specific gravity)\*2
- ✓ Comparator function for faster and more accurate filling, packing, sorting, etc.
- ✓ Adjustable response characteristics depending on the degree of drafts and vibrations at the location
- ✓ Security ring for wire-locking the balance to prevent theft

\*1 Only to be used with four DURACELL AA alkaline MN1500 LR6, ENERGIZER AA E91 alkaline LR6 AM3, or Panasonic AA alkaline LR6 (XJ) 1.5V batteries.

\*2 Either tl (tael) or tol (tola) can be added upon request.



## Specifications

		EK-300EP	EK-3000EP	EK-12KEP
Weighing capacity		300 g	3000 g	12 kg
Minimum weighing value		0.01 g	0.1 g	1 g
Repeatability (standard deviation)		0.01 g	0.1 g	1 g
Linearity		±0.02 g	±0.2 g	±1 g
Sensitivity drift		±20 ppm/°C (10 to 30°C/50 to 86°F)		
Counting mode	Min. unit weight*3	0.01 g	0.1 g	1 g
	No. of samples	5, 10, 25, 50 or 100 pieces		
Percent mode	Min. % display	0.1%		
	Min. 100% weight	1 g	10 g	100 g
Operating temperature and humidity		0 to 40°C/32 to 104°F, 85% RH or less (no condensation)		
Battery life		Approx. 250 hours (with four AA alkaline batteries*1, backlight off)		
Weighing pan size		∅110 mm	133×170 mm	
Net weight		Approx. 1.2 kg	Approx. 1.5 kg	
Calibration weight*3		300 g	3000 g	10 kg


\*3 Factory setting

## Options

EJ-12 Carrying case



## Dimensions (mm/inches)

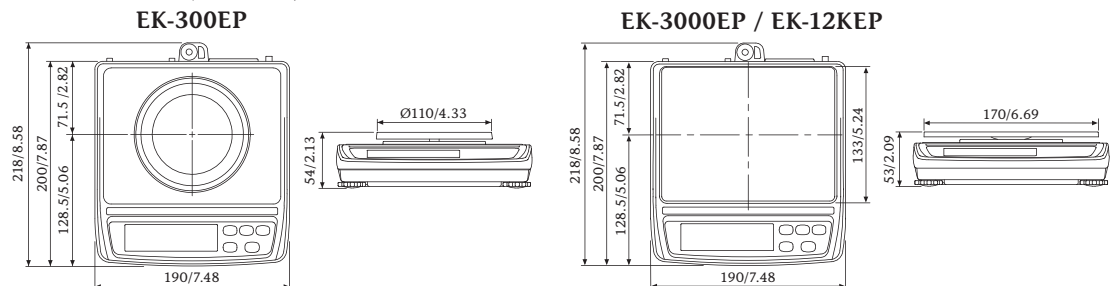

**A&D Company, Limited**  
3-23-14 Higashi-Ikebukuro, Toshima-ku, Tokyo 170-0013 JAPAN  
Telephone:[81](3) 5391-6132 Fax:[81](3) 5391-6148  
<http://www.aandd.jp>

**A&D ENGINEERING, INC.**  
1756 Automation Parkway, San Jose, CA 95131 U.S.A.  
Telephone:[1](408) 263-5333 Fax:[1](408) 263-0119

**A&D Australasia Pty Ltd.**  
32 Dew Street, Thebarton, South Australia 5031 AUSTRALIA  
Telephone:[61](8) 8301-8100 Fax:[61](8) 8352-7409

**A&D INSTRUMENTS LTD.**  
Unit 24/26 Blacklands Way Abingdon Business Park,  
Abingdon, Oxon OX14 1DY UNITED KINGDOM  
Telephone:[44](1235) 550420 Fax:[44](1235) 550485

**<German Sales Office>**  
Hamburger Straße 30 D-22926 Ahrensburg GERMANY  
Telephone:[49](0) 4102 459230 Fax:[49](0) 4102 459231

**A&D KOREA Limited**  
817, Manhattan Bldg., 33, Gukjegeumyung-ro 6-gil,  
Yeongdeungpo-gu, Seoul, 07331, KOREA  
Telephone:[82](2) 780-4101 Fax:[82](2) 782-4280

**A&D RUS CO., LTD.**  
Vereyskaya str.17, Moscow, 121357 RUSSIA  
Telephone: [7] (495) 937-33-44 Fax: [7] (495) 937-55-66

**A&D Instruments India Private Limited**  
509 Udyog Vihar Phase V  
Gurgaon-122 016, Haryana, INDIA  
Telephone: [91](124) 471-5555 Fax: [91](124) 471-5599